Patchwork bag & Pouch



This kit includes

Top fabric/Yarn dyed (11 kinds), Lining/Printed (1 kind) Quilt batting (1 pce), Adhesive interlining (1 pce), Embroidery thread (4 kinds) Tape with artificial leather. Instruction, Full size template

Things required

Sewing needle, Marking pins, Embroidery needle, Sewing thread (Similar color to fabric), Basting thread. Scissors, Ruler, Marking pen, Iron, Cardboard paper * Sewing machine is also available.

How to use full size templates

- ① Cut templates along with cutting line.
- ② Referring to "Layout", put templates (face up) on wrong side of fabric.
- 3 Mark finished line and cuttling line on fabric and cut fabric.
- (After marking cutting lines, cut seam allowance of templates. Put them on fabric again and mark
- After cutting fabric, glue templates of House, Scallap. Lane and hill to wrong side of your cardboard and use them when applique.


- Use your pins before stitching to avoid fabric to be scooched.
- When stitch fabrics together, use one back-stitch at begining and ending.


ZaiT


House bag

Layout

Read instruction carefully before making. *Put tempalates(face up) on wrong side of fabric.



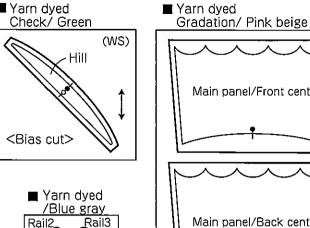



15cm Over casting Seam allowance 2cm Yarn dyed Check /Brown Rail1 WS) <Bias cut>

■ Printed/ Beige

Seam allowance 1cm

Seam allowance 2cm

Main body/Front


Seam allowance 1cm

Lining

Main body/Back

■ Batting ■ Adhesive interlining (※ No seam allowance for adhesive intertining) Bottom Adhesive Main body Main body interlining Cutting lir Adhesive interlining Adhesive interlining Cutting line Cutting line No seam ineterlining only

Scallap

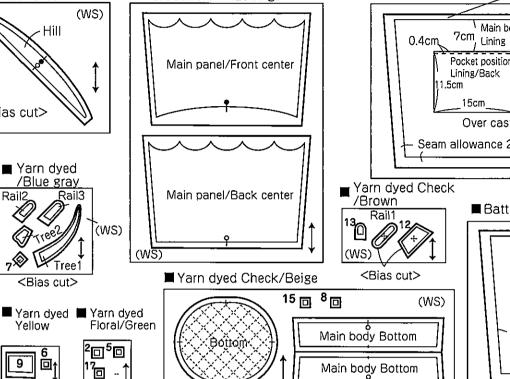

Tree 1

Notch

RS=Right side

WS=Wrong side

Making instruction

°

Cutting line

Finished line

Marth mark

Fabric direction

Facing

Facing I

Dots/Blue

(WS)

Bias cut

Yarn dyed Dots/Pink

Scallap

Scallap

■Yarn dyed

/Red

Hill (WS)

<Bias cut>

- 1 Cut fabric. *Refer to "Layout" and "How to use full size template".
- 2 Applique on front and back side of main panel. *Refer to "Full size finished design" and "how to applique", applique in order.

<Bias cut>

d 回↓ 9

(WS)

(WS)


① Mark applique design on main panel. front center panel.

Large check ■ Yarn dyed ■ Yarn dyed


/Dark red

Check

② Applique(tree, house and rail) on main panel, front center panel(RS).




① Cut main panel from wrong side, along with seam allowance of scallap and hill.

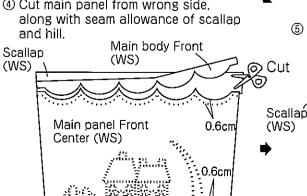



Main panel Front (WS)

3 Applique (scallap and hill) on main panel front center panel(RS) with whip stitch.



⑤ Like same way, applique on main panel back center panel. Attach scallage, cut main panel from wrong side along with seam allowance.

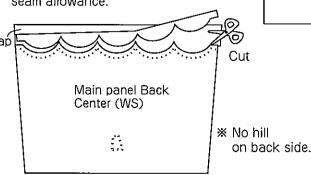

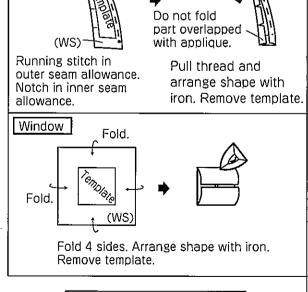


How to applique


Use template

on cardboad

paper.

Running stitch.



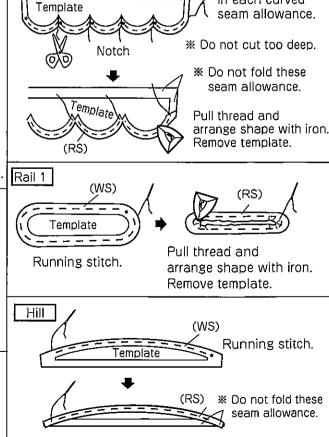

Pull thread and arrange shape with iron.

OLYMPUS THREAD MFG. CO., LTD. (ALL RIGHTS RESERVED)

Remove template.

No.1/5

1,5 cm

11.5 cm

Seam allowance 1cm

Running stitch

in each curved

Bottom

(WS)


Pocket

Center line

www.olympus-thread.com

Refer to full size finished design, embroidery on main panel.


- Embroidery thread consists of 6 strands. Pull strands respectively and put designated number of strands together for use.
- * Refer to No. 2 for how to stitch.

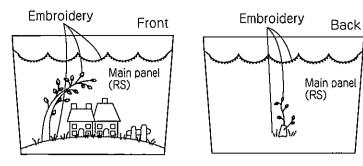

Embroidery threads:


Light brown 1m x 5pcs for colonial knot stitch, Dark brown 1m x 5pcs. Brown red 1m. Green 1m for other stitch.

4 Put right side of 3 (main panel) and bottom panel together and stitch them together.

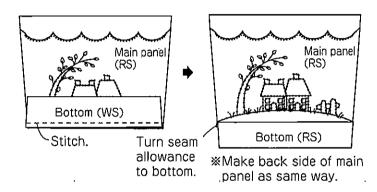


5 Attach adhesive interlining to lining and stitch guilting.


- ① Mark quilting line on top fabric.
- 2 Attach adhesive interlining to lining with iron.

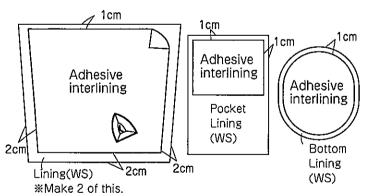


- 3 Like below picture, put fabric and batting together and baste them together.
 - * Baste back and bottom like same way.

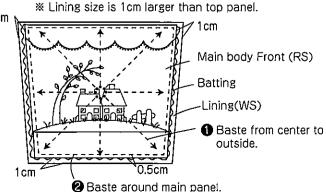


(4) Quilting lines and in ditch on (3) *Refer to full size finished design.

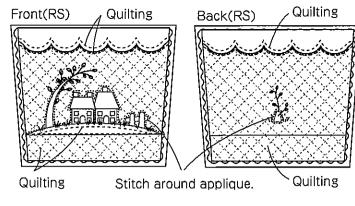


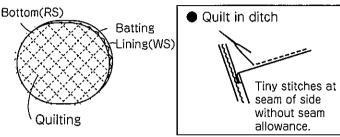


⑤ Remove basting threads.

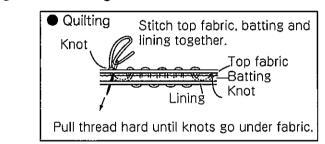

6 Make a bag.

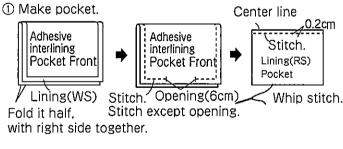





Back

Turn it from opening. Stitch 0.2cm below center line and stitch opening.


2 Attach pocket to wrong side of main panel, back side.

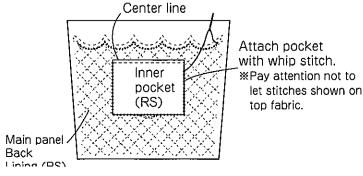

③ Put right side of main panel front and back together and stitch side seam. Leave 0.6cm and cut away extra seam allowance.

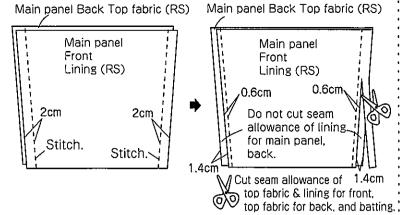


4 Wrap cut seam allowance with left seam allowance (lining for back) attach main panel front, with whip stitch.

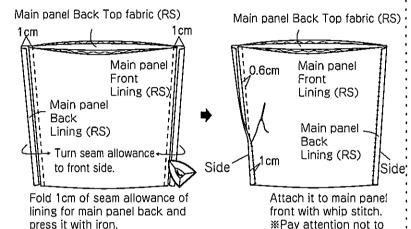


let stitches shown on

⑤ Attach bottom to bag.

top fabric. Put right side of main panel and bottom together. Wrap bottom seam allowance with lining and stitch it to bottom with whip stitch.

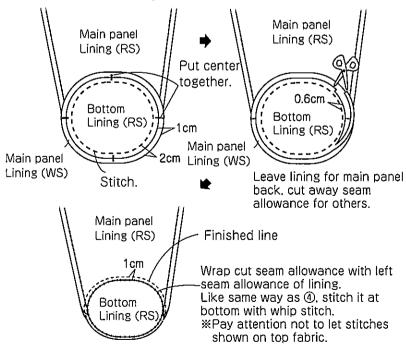


6 Put right side of facing together, stitch them together.




No.1/5

(7) Cut tape for handle to make 2 pcs pf 35cm. Refer to full size finished design, attach handle as shown. (Stitch 1.5cm from end.)

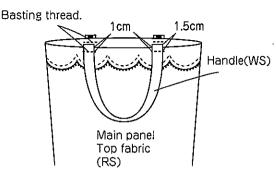

® Put right side of ® and 7 together, stitch top seam together.

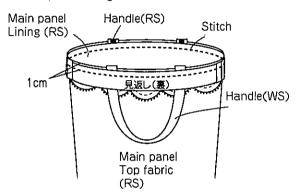

 Fold 1cm of facing, attach it to lining with whip stitch.

